


AliDeck

TRIPLE BOLT CHANNEL

Specification
Datasheet

The Triple Bolt Channel has been designed to be used in conjunction with our Senior and Junior Decking Boards to deliver the ability to install deck platforms without the need to drill the steelwork at every board, protecting the integrity of your steel framework and allowing for super-fast installation times!

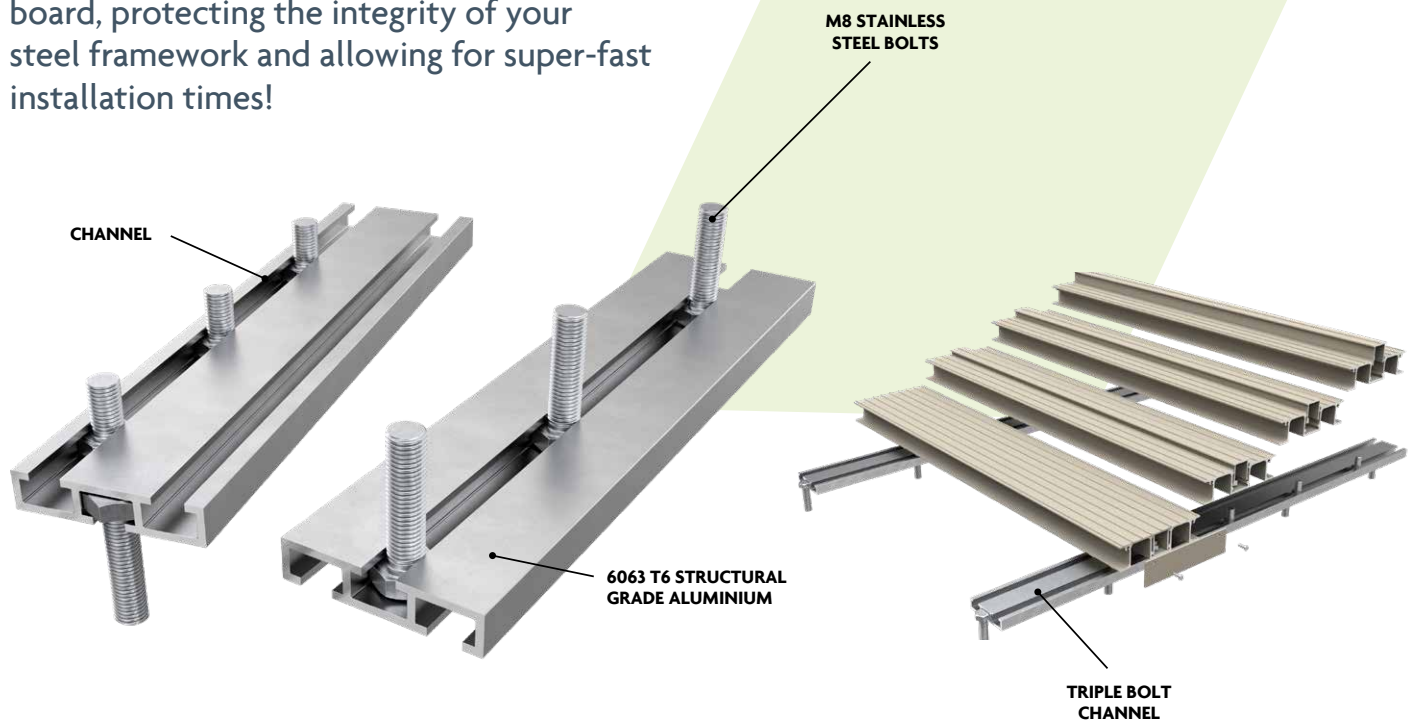

Product Specification

Fire Rated:	A2-s1, d0 and A2fl-s1 when coated
Dimensions:	10mm x 50mm
Material:	6063 T6 aluminium 30% minimum recycled
Colours:	Textured Silver Grey / Textured Sand.
Stock Extrusion Length:	6m


**FIRE RATED
A2-s1, d0 &
A2fl-s1 WHEN
COATED**

Unit 27 Laker Road
Rochester Airport Industrial Estate
Rochester
Kent ME1 3QX

Tel: 01622 235 672
Email: info@alideck.co.uk
www.alideck.co.uk

ALIDECK™
Aluminium Decking

Dimensions

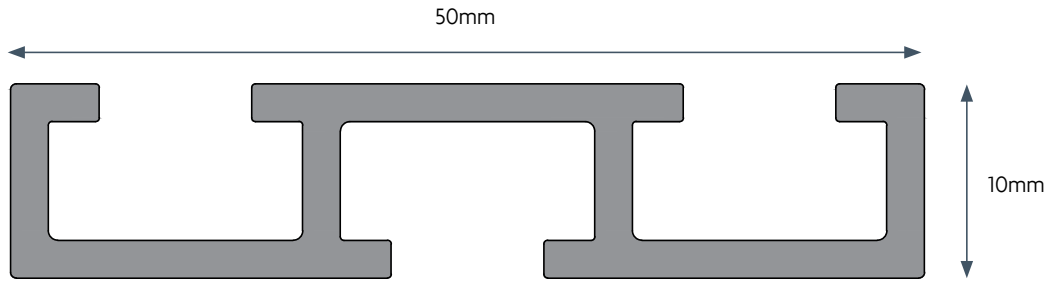

Colour Options

AliDeck Triple Bolt Channel are available in our full range of standard colours. Please refer to our Standard Colour Range datasheet for colour options (available at www.alideck.co.uk/downloads).

Non-standard colours are available on request as special orders, but may affect cost and lead-time. The Triple Bolt Channel can be supplied non-coated/mill finish to achieve A1 fire rating.



Warranty

The Triple Bolt Channel is supplied with a **30 year warranty** against splitting, cracking, warping, splintering, rotting, twisting and material or manufacturing defects. It has a minimum **60 year life** expectancy.



**ALL
ALUMINIUM**



**HEAT
RESISTANT**



**DURABLE
TEXTURED FINISH**



**LOW
MAINTENANCE**



RECYCLABLE



**STABLE IN ALL
WEATHER
CONDITIONS**



**A2-s1, d0 & A2fl-s1
FIRE RATED**

Unit 27 Laker Road
Rochester Airport Industrial Estate
Rochester
Kent ME1 3QX

Tel: 01622 235 672
Email: info@alideck.co.uk
www.alideck.co.uk

 **ALIDECK**™
Aluminium Decking