
(Alideck - Lite Balcony Board	Notes. Example Sections of Lite Balcony Board			
A. Lite Balcony Board	B. Lite Balcony Board Clip	C. Supa Joist	D. Pedestal Bracket	
				Customer Sign Off. Sign Date Record Of Revision Changes. 1. Creation of drawing (V1)
E. End Plate				Colour; Any Standard RAL Colour
				Delivery and Storage. When components are delivered please ensure they are inspected and stored flat, also please ensure they are stored out of the sun. Do not store components upright.
				Product Details: Lite Balcony Board, Lite Balcony Board Clip, Supa Joist and Pedestal Bracket
				Aluminium Decking From This drawing and the product it displays is the sole property of The Milwood Group any reproduction of this drawing or product without the written permission of The Milwood Group is prohibited.
				Drawing Title: (Alideck - Lite Balcony Board With Supa Joist) - (Installation Guide)
				Product: Lite Balcony Board
				Date 26-06-20Page Size A3 (L)Scale DNSDrawn
				Issuer Sequence (Tol) Rev MIL 000001 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
				If In any doubt about details on this drawing call us on 01622 235 672 3rd Angle Projection Finish Page 1 of 9

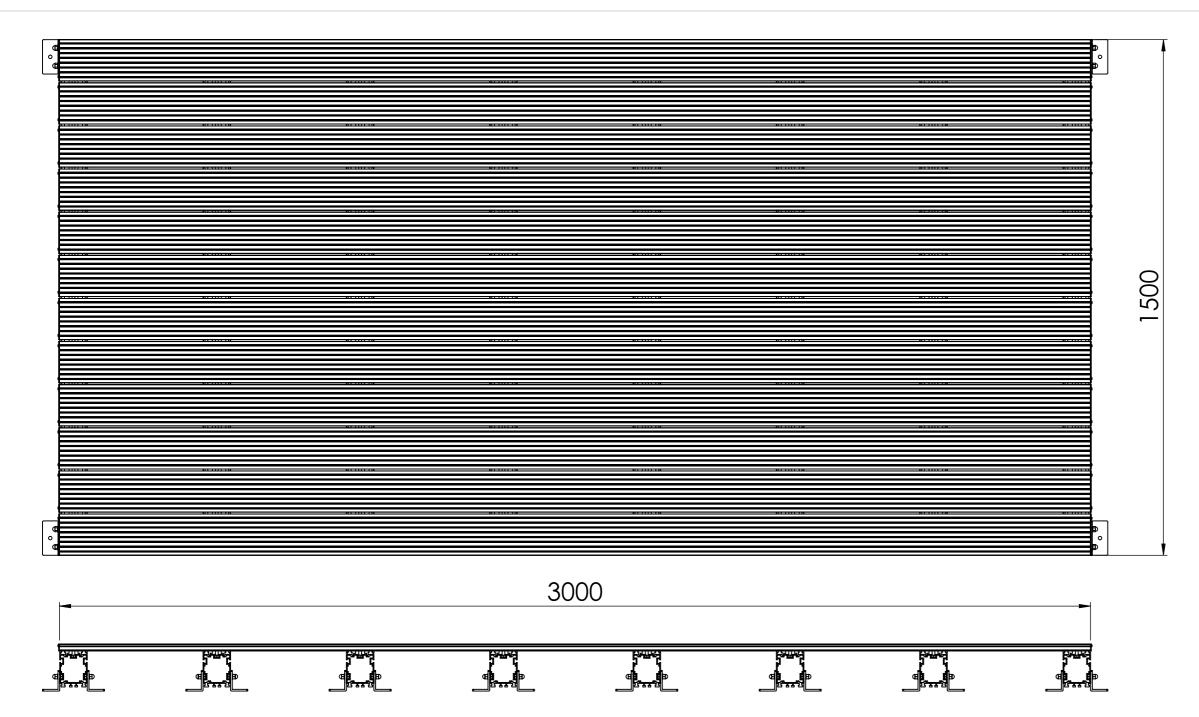

Important guidance notes for installation:

- 1. When installing Lite Boards ensure a minimum of 3mm to a maximum of 8mm (we recommend 5mm) is allowed between each board for drainage.
- 2. When installing onto waterproofing, ensure adequate spreader plates or additional padding is added between the underside of the foot plate and the waterproofing. AliDeck cannot be held responsible for penetration or damage to existing waterproofing. If unsure of application please contact us.
- 3. Fix all boards within a maximum span requirements allowed, (400mm on the Lite Board) do not exceed the span requirements for each type of board, please refer to the span tables on the website, contact us for further details if unsure.
- 4. When cutting boards to width, never cut a board less that the centre section of 30mm as the cover clip will not be able to be installed. Consider cutting the first and the last board if required to obtain the desired platform width.
- 5. Please ensure the decking is covered with a barrier (plywood or plastic material) once installed to prevent any third party debris, swarf or waste material from potentially damaging the surface finish.
- 6. If you are installing onto existing timber, please ensure you have a clear 150mm of air gap underneath the decking to ensure good airflow and to prevent heat build up.
- 7. Please ensure each clip is level to the next clip and in line to ensure the boards will clip down successfully.
- 8. Please be sure the clips are in the correct locations to avoid progressive error, we recommend you installing the first line of clips then install the first board, then install the second line of clips, (just incase an error causes issues to the next board).
- 9. Fixings to use are M8 Stainless Steel Bolts, Nuts and Washers, 4mm No. 8 Stainless Steel Screws and Self-Drilling Screws if required.

lotes.

Example Sections of Lite Balcony Board

Customer Sign Off.		
Sign		
Data		

Record Of Revision Changes.

Creation of drawing (V1)

Colour; Any Standard RAL Colour

Delivery and Storage.

When components are delivered please ensure they are inspected and stored flat, also please ensure they are stored out of the sun. Do not store components upright.

Product Details:

Lite Balcony Board, Lite Balcony Board Clip, Supa Joist and Pedestal Bracket



From

This drawing and the product it displays is the sole property of The Milwood Group any reproduction of this drawing or product without the written permission of The Milwood Group is prohibited.




Drawing Title:

(Alideck - Lite Balcony Board With Supa Joist) - (Installation Guide)

Product:

LITE DEICETTY	Life baleoffy board				
Date 26-06-20	Page Size A3 (L)	Scale DNS	Drawn Shyam		
Issuer MIL	Sequence 000001	(Tol) +/- 1mm	Rev		
If In any doubt about details on this drawing call us on 01622 235 672	3rd Angle Projection	Finish PPC	Page 2 of 9		

Step 1: Lay the Joists in the position required (no more than 400mm apart)

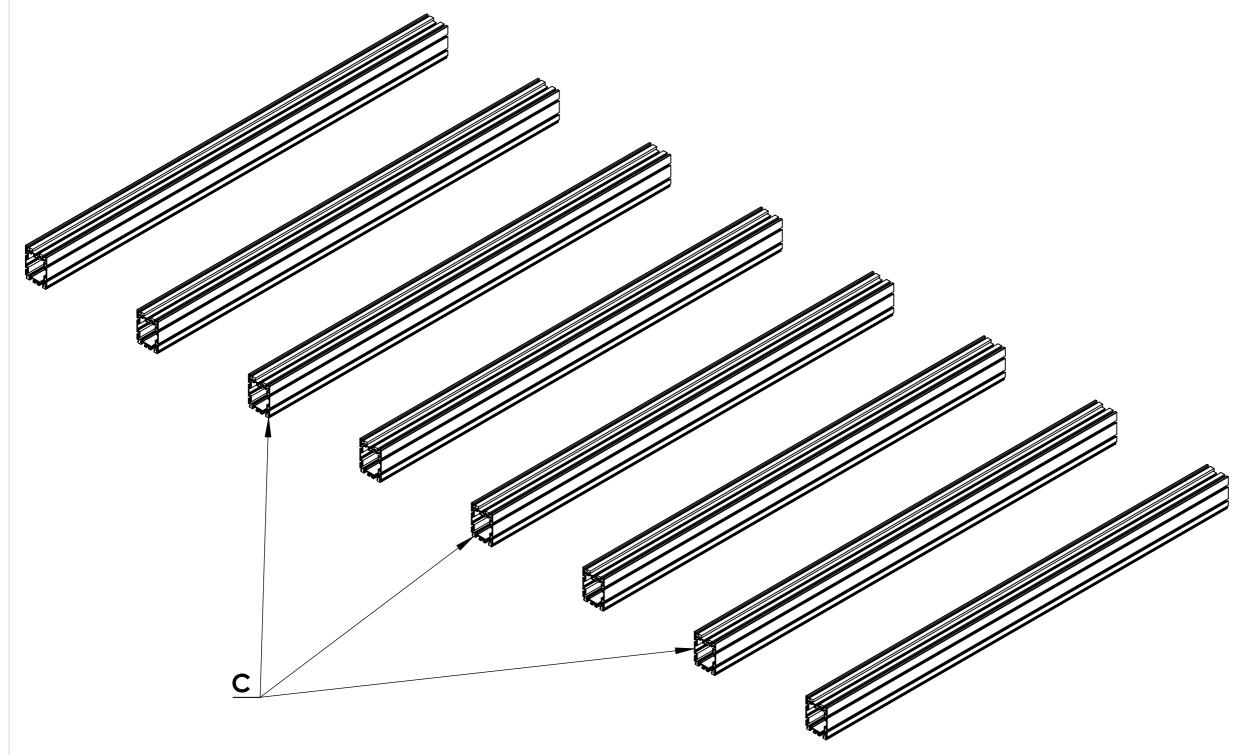

lotes.

Example Sections of Lite Balcony Board

Customer	Sign	Off.	
	J.9	•	

an an

Date

Record Of Revision Changes.

Creation of drawing (V1)

Colour; Any Standard RAL Colour

Delivery and Storage.

When components are delivered please ensure they are inspected and stored flat, also please ensure they are stored out of the sun. Do not store components upright.

Product Details:

Lite Balcony Board, Lite Balcony Board Clip, Supa Joist and Pedestal Bracket



rom

This drawing and the product it displays is the sole property of The Milwood Group any reproduction of this drawing or product without the written permission of The Milwood Group is prohibited.




Drawing Title:

(Alideck - Lite Balcony Board With Supa Joist) - (Installation Guide)

Product:

Date 26-06-20	Page Size A3 (L)	Scale DNS	Drawn Shyam	
Issuer MIL	Sequence 000001	(Tol) +/- 1mm	Rev	
If In any doubt about details on		Finish	Page	
this drawing call us on 01622 235 672	3rd Angle Projection	PPC	3 of 9	

Step 2 : Attach the Adjustable Pedestal Brackets to the Supa Joist Use M8 Bolts, Nuts and Washers to fix Brackets to Joists.

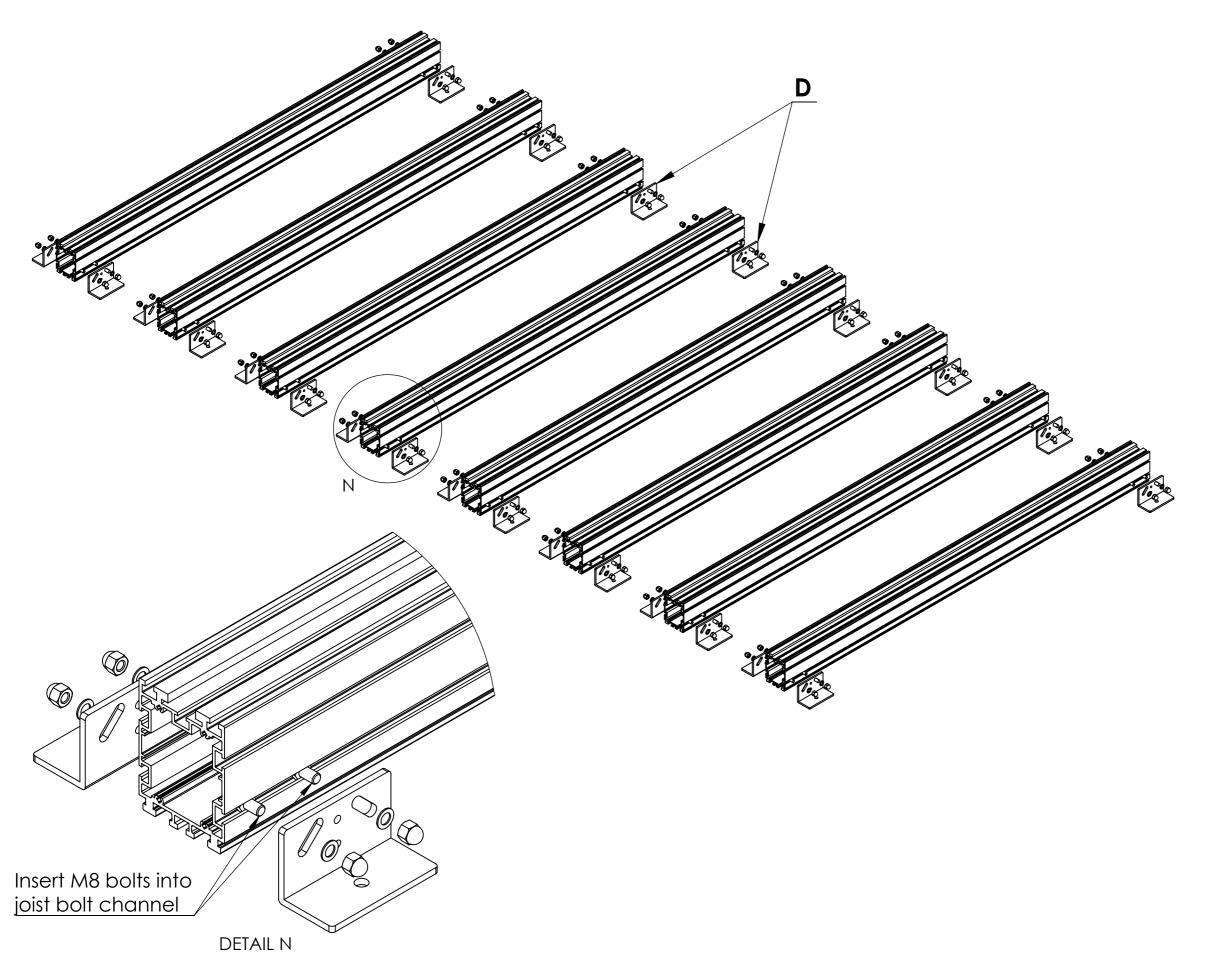

lotes.

Example Sections of Lite Balcony Board

Customer Sign Off.	
Sign	
Date	

Record Of Revision Changes.

. Creation of drawing (V1)

Colour; Any Standard RAL Colour

Delivery and Storage.

When components are delivered please ensure they are inspected and stored flat, also please ensure they are stored out of the sun. Do not store components upright.

Product Details:

Lite Balcony Board, Lite Balcony Board Clip, Supa Joist and Pedestal Bracket



rom

This drawing and the product it displays is the sole property of The Milwood Group any reproduction of this drawing or product without the written permission of The Milwood Group is prohibited.




Drawing Title:

(Alideck - Lite Balcony Board With Supa Joist) - (Installation Guide)

Product:

Ello Balcotty Board					
Date 26-06-20	Page Size A3 (L)	Scale DNS	Drawn Shyam		
Issuer MIL	Sequence 000001	(Tol) +/- 1mm	Rev		
If In any doubt about details on this drawing call		Finish	Page		
us on 01622 235 672	3rd Angle Projection	PPC	4 of 9		

Step 3 : Attach the Clips as shown and ensure the center to center dimension is 125mm for a 5mm Board spacing. Use M8 Bolts, Nuts and Washers to fix Clip to Joists.

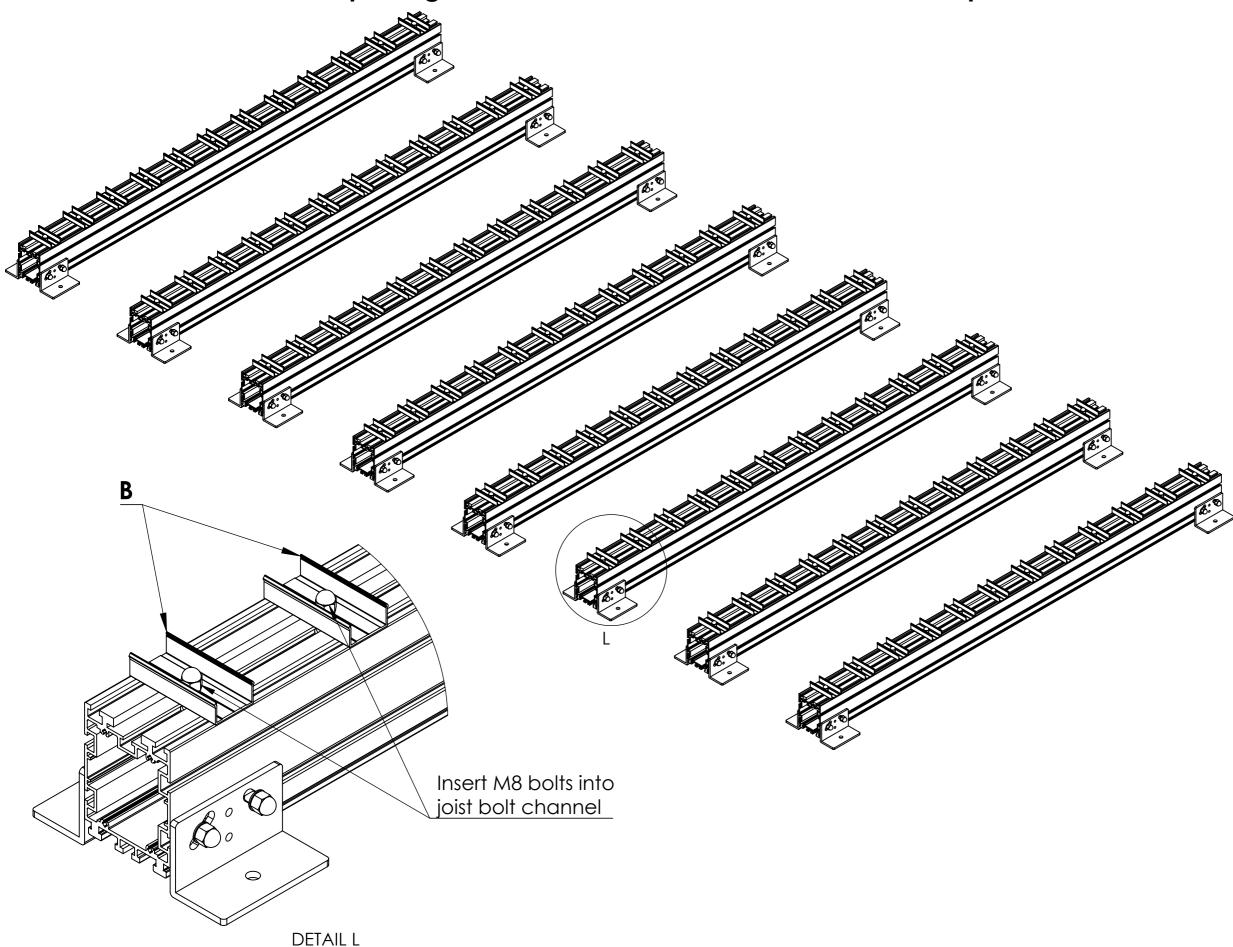

Notes

Example Sections of Lite Balcony Board

ustomer Sign Of	ff.	

_ .

Record Of Revision Changes.

Creation of drawing (V1)

Colour; Any Standard RAL Colour

Delivery and Storage.

When components are delivered please ensure they are inspected and stored flat, also please ensure they are stored out of the sun. Do not store components upright.

Product Details:

Lite Balcony Board, Lite Balcony Board Clip, Supa Joist and Pedestal Bracket



-rom

This drawing and the product it displays is the sole property of The Milwood Group any reproduction of this drawing or product without the written permission of The Milwood Group is prohibited.




Drawing Title:

(Alideck - Lite Balcony Board With Supa Joist) - (Installation Guide)

Product:

Date 26-06-20	Page Size A3 (L)	Scale DNS	Drawn Shyam
Issuer MIL	Sequence 000001	(Tol) +/- 1mm	Rev V1
If In any doubt about details on this drawing call us on 01622 235 672	3rd Angle Projection	Finish PPC	Page 5 of 9

Step 4: Attach the first Board to the Clips as shown

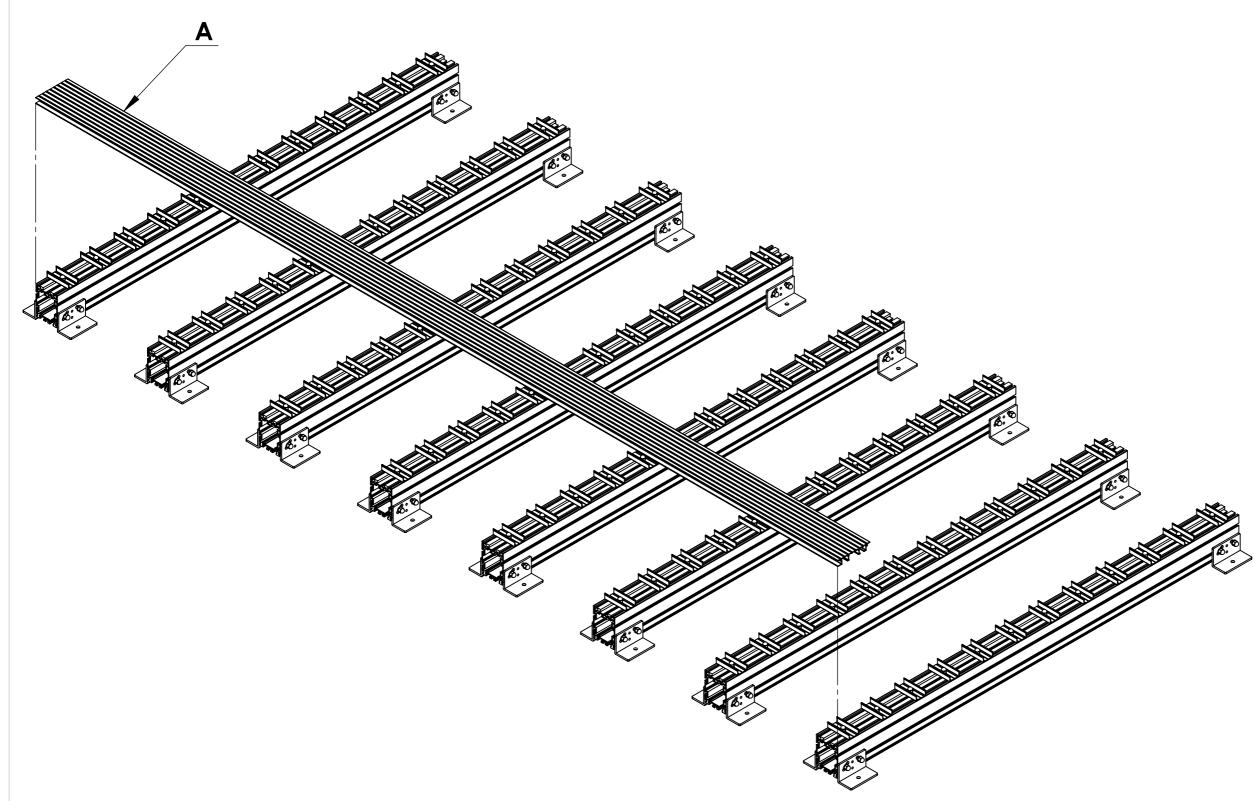

Notes.

Example Sections of Lite Balcony Board

Customer Sign Off.	
Sign	
Date	

Record Of Revision Changes.

Creation of drawing (V1)

Colour; Any Standard RAL Colour

Delivery and Storage.

When components are delivered please ensure they are inspected and stored flat, also please ensure they are stored out of the sun. Do not store components upright.

Product Details:

Lite Balcony Board, Lite Balcony Board Clip, Supa Joist and Pedestal Bracket



rom

This drawing and the product it displays is the sole property of The Milwood Group any reproduction of this drawing or product without the written permission of The Milwood Group is prohibited.




Drawing Title:

(Alideck - Lite Balcony Board With Supa Joist) - (Installation Guide)

Product:

,	,				
Date 26-06-20	Page Size A3 (L)	Scale DNS	Drawn Shyam		
Issuer MIL	Sequence 000001	(Tol) +/- 1mm	Rev V1		
If In any doubt about details on		Finish	Page		
this drawing call us on 01622 235 672	3rd Angle Projection	PPC	6 of 9		

Step 5: Attached the rest of the Boards as shown

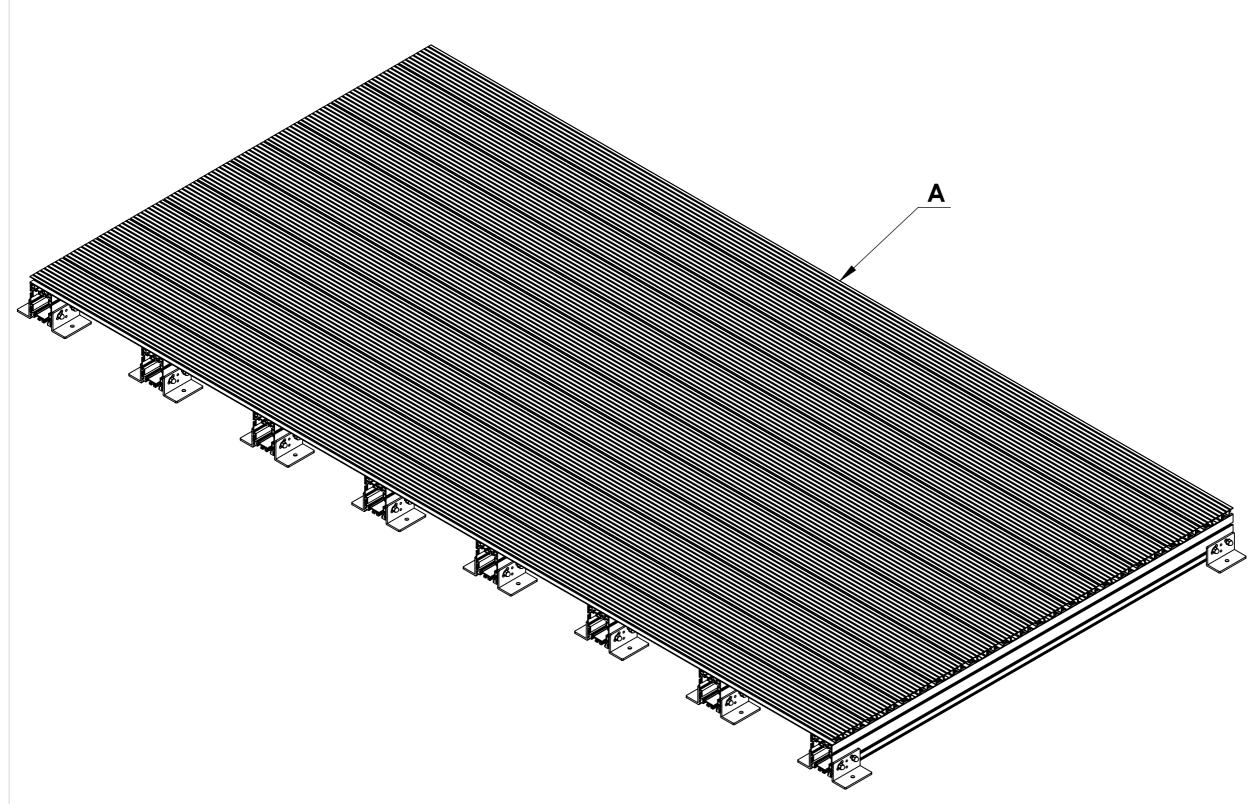

otes.

Example Sections of Lite Balcony Board

วิบร	1	 C: -	 ~:	•	

Date

Record Of Revision Changes.

. Creation of drawing (V1)

Colour; Any Standard RAL Colour

Delivery and Storage.

When components are delivered please ensure they are inspected and stored flat, also please ensure they are stored out of the sun. Do not store components upright.

Product Details:

Lite Balcony Board, Lite Balcony Board Clip, Supa Joist and Pedestal Bracket



rom

This drawing and the product it displays is the sole property of The Milwood Group any reproduction of this drawing or product without the written permission of The Milwood Group is prohibited.



Drawing Title:

(Alideck - Lite Balcony Board With Supa Joist) - (Installation Guide)

Product:

Date 26-06-20	Page Size A3 (L)	Scale DNS	Drawn Shyam
Issuer MIL	Sequence 000001	(Tol) +/- 1mm	Rev V1
If In any doubt about details on this drawing call us on 01622 235 672	3rd Angle Projection	Finish PPC	Page 7 of 9

(Alideck - Lite Balcony Board With Supa Joist) - (Installation Guide) Step 6: Now attach the End Plates using 4mm no. 8 Stainless Steel Screw if required Product:

DETAIL M

Example Sections of Lite Balcony Board

Customer Sign Off.

Record Of Revision Changes.

Creation of drawing (V1)

Colour; Any Standard RAL Colour

Delivery and Storage.

When components are delivered please ensure they are inspected and stored flat, also please ensure they are stored out of the sun. Do not store components upright.

Product Details:

Lite Balcony Board, Lite Balcony Board Clip, Supa Joist and Pedestal Bracket




This drawing and the product it displays is the sole property of The Milwood Group any reproduction of this drawing or product without the written permission of The Milwood Group is prohibited.



Drawing Title:

(Alideck - Lite Balcony Board With Supa Joist) - (Installation Guide)

Date 26-06-20	Page Size	Scale DNS	Drawn Shyam
Issuer MIL	Sequence 000001	(Tol) +/- 1mm	Rev V1
If In any doubt about details on this drawing call us on 01622 235 672	3rd Angle Projection	Finish PPC	Page 8 of 9

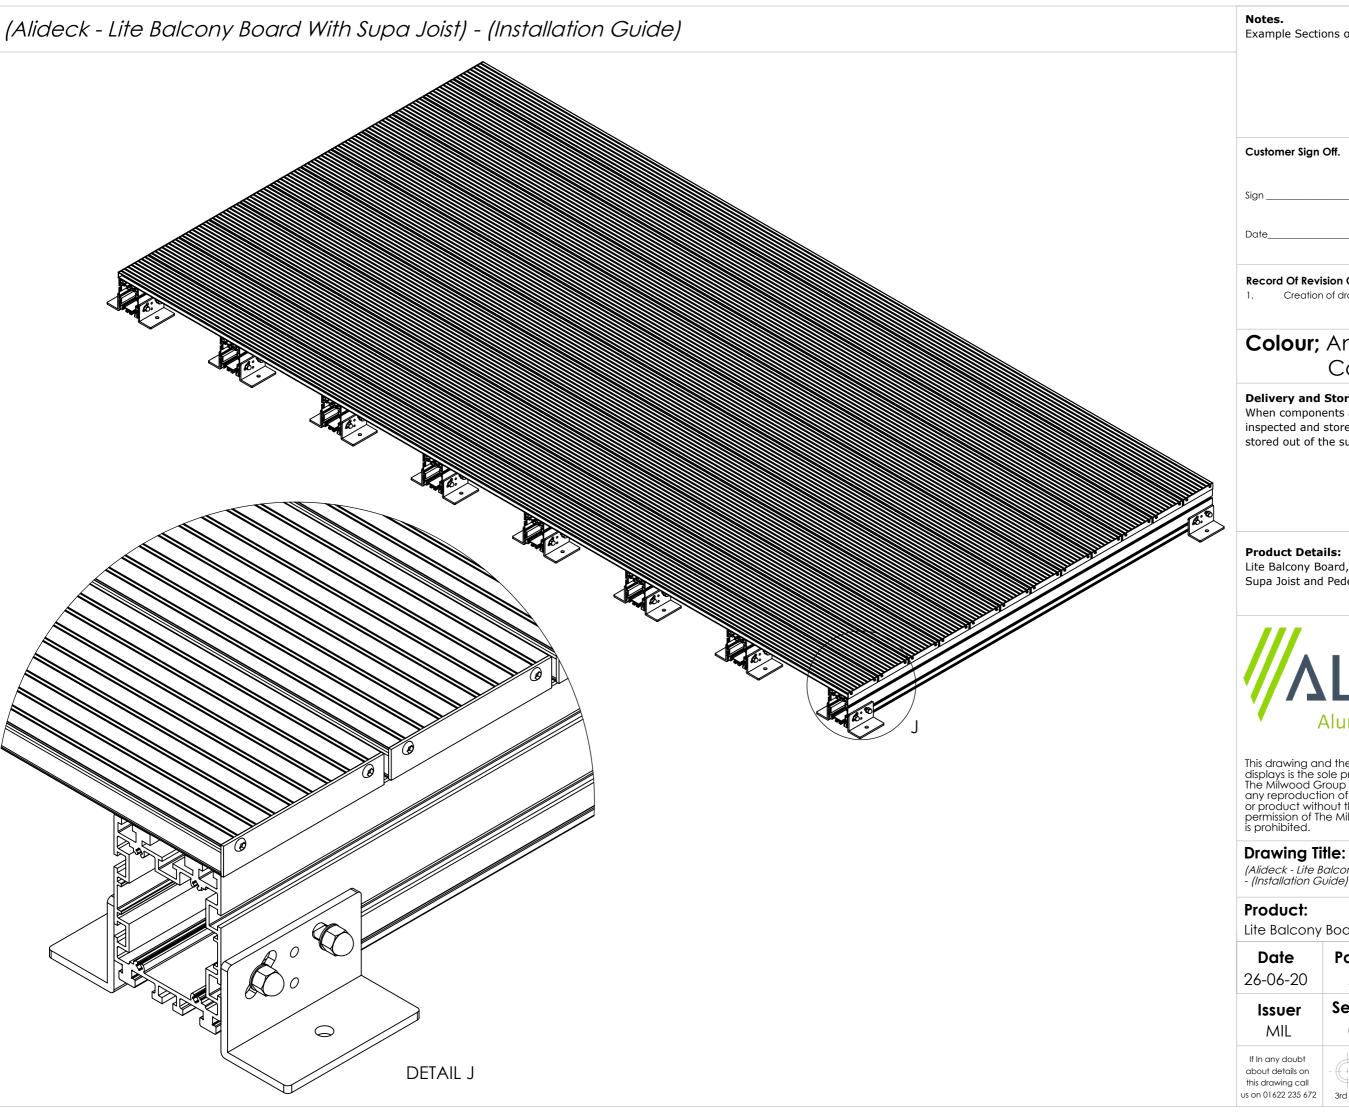

Example Sections of Lite Balcony Board

Record Of Revision Changes.

Creation of drawing (V1)

Colour; Any Standard RAL Colour

Delivery and Storage.

When components are delivered please ensure they are inspected and stored flat, also please ensure they are stored out of the sun. Do not store components upright.

Lite Balcony Board, Lite Balcony Board Clip, Supa Joist and Pedestal Bracket



This drawing and the product it displays is the sole property of The Milwood Group any reproduction of this drawing or product without the written permission of The Milwood Group is prohibited.



(Alideck - Lite Balcony Board With Supa Joist) - (Installation Guide)

Date 26-06-20	Page Size A3 (L)	Scale DNS	Drawn Shyam
Issuer MIL	Sequence 000001	(Tol) +/- 1mm	Rev V1
If In any doubt about details on this drawing call us on 01622 235 672	3rd Angle Projection	Finish PPC	Page 9 of 9